

OPTIONS**Flush Volume**

3.5 gpf (13.2 Lpf) (3.5)

2.4 gpf (9.1 Lpf) (2.4)

Bypass

Dual-Filtered Fixed Bypass Diaphragm

Handle

Front of Valve (H)

Push Button

Metal Index (L)

Control Stop

Less (L/STOP)

Vacuum Breaker

Less (XYV)

Outlet Tube

Trap Primer (TP)

Pipe Support

Solid Ring (YK)

Compliances & Certifications

BAA Compliant

BABAA Compliant

Made in the USA

UPC Certified

ADA Compliant

NOTESFor product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

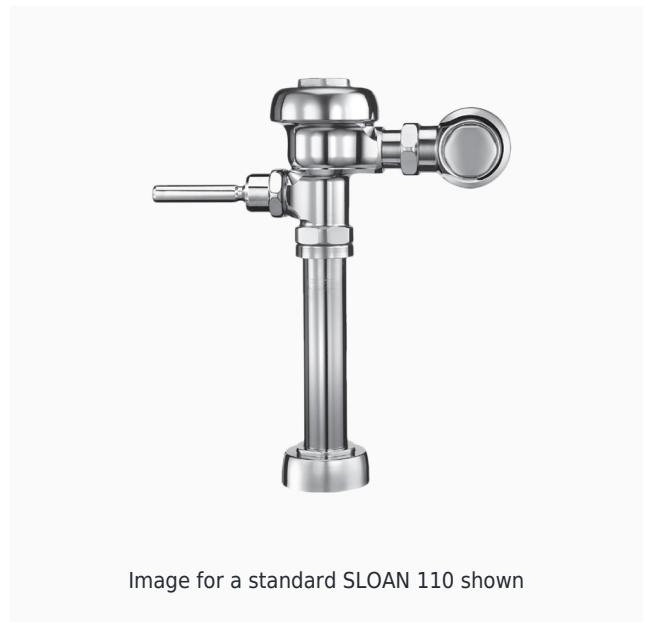


Image for a standard SLOAN 110 shown

DESCRIPTION

Sloan® Exposed Manual Water Closet Flushometer

FEATURES

- Flush volumes start as low as 3.5 gpf/13.2 Lpf
- Water conservation is aided by the ADA-compliant, non-hold-open handle, which prevents toilet from exceeding intended flush volume
- Flush accuracy is controlled by CID™ technology, also enhancing water efficiency
- Integrity of the product is maintained with the vandal-resistant stop cap
- Durability is facilitated with high copper, low zinc brass castings for dezincification resistance
- Adjustable tailpiece to accommodate different height requirements
- High chloramine resistant PERMEX synthetic rubber diaphragm with Linear Filtered Bypass and Vortex Cleansing Action
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

DOWNLOADS

- [Sloan Exposed Installation Instructions](#)
- [Sloan Exposed \(Spanish\) Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Sloan Flushometer Repair and Maintenance Guide](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com

- [Additional Downloads](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131
Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com