

**OPTIONS****Flush Volume**

- 1.6 gpf (6.0 Lpf) (1.6)
- 1.28 gpf (4.8 Lpf) (1.28)
- 1.1 gpf (4.2 Lpf) (1.1)

**Water Efficiency**

- Low Consumption
- High Efficiency

**Bypass**

- Dual-Filtered Fixed Bypass Diaphragm
- Dual-Filtered Bypass

**Handle**

- Saniguard®
- Front of Valve (H)
- Nickel-Silver (YA)

**Push Button**

- Metal Index (L)
- 3" Metal Oscillating (L3)
- Front of Valve (HL3)

**Control Stop**

- Less (L/STOP)
- 1" Straight (E)
- Wheel Handle (K)

**Inlet**

- Back of Valve (B)

**Vacuum Breaker**

- Less (XYV)

**Outlet Tube**

- Trap Primer (TP)

**Bumper**

- Angle Stop (YO)

**Pipe Support**

- Split Ring (YJ)

**Compliances & Certifications**

- BAA Compliant
- BABAA Compliant
- cUPC Certified
- Made in the USA
- UPC Certified
- ADA Compliant
- UL Certified

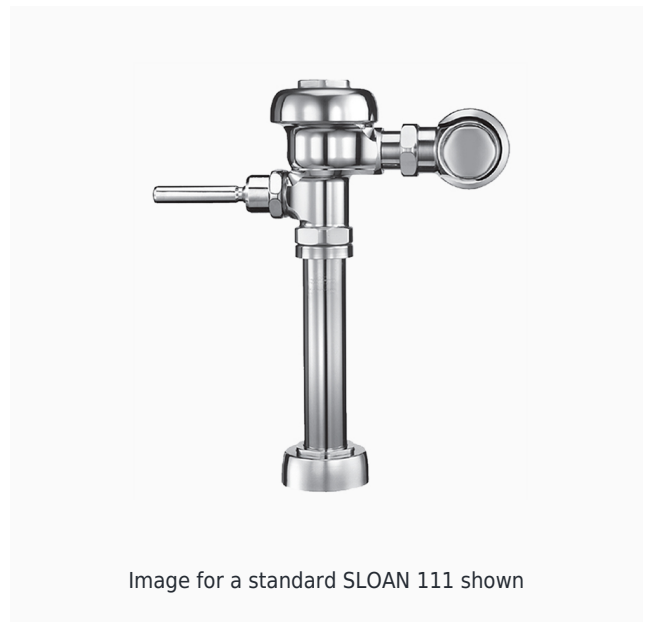


Image for a standard SLOAN 111 shown

**DESCRIPTION**

Sloan® Exposed Manual Water Closet Flushometer

**FEATURES**

- Flush volumes start as low as 1.28 gpf/4.8 Lpf
- Water conservation is aided by the ADA-compliant, non-hold-open handle, which prevents toilet from exceeding intended flush volume
- Flush accuracy is controlled by CID™ technology, also enhancing water efficiency
- Integrity of the product is maintained with the vandal-resistant stop cap
- Durability is facilitated with high copper, low zinc brass castings for dezincification resistance
- Adjustable tailpiece to accommodate different height requirements
- High chloramine resistant PERMEX synthetic rubber diaphragm with Linear Filtered Bypass and Vortex Cleansing Action
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

**DOWNLOADS**

- [Sloan Exposed Installation Instructions](#)
- [Sloan Exposed \(Spanish\) Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Sloan Flushometer Repair and Maintenance Guide](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • [sloan.com](http://sloan.com)

BREEAM Water Credit  
Green Globes Water Credit  
LEED V4 Water Efficiency Credit

- [Sloan/Regal ESS Repair and Maintenance Guide](#)
- [Bumper Pipe and Tube Supports Repair & Maintenance Guide](#)
- [Flushometer Pressure gauges](#)
- [Additional Downloads](#)

**NOTES**

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.