

OPTIONS**Flush Volume**

- 1.6 gpf (6.0 Lpf) (1.6)
- 3.5 gpf (13.2 Lpf) (3.5)
- 1.28 gpf (4.8 Lpf) (1.28)

Water Efficiency

- Low Consumption
- Water Saver
- High Efficiency

L Dimension

- 10 ¾" (273mm) (10-3/4-LDIM)
- 6 ¾" (171mm) (6-3/4-LDIM)
- 3 ¾" (95mm) (3-3/4-LDIM)
- 4 ¾" (121mm) (4-3/4-LDIM)
- 8 ¾" (222mm) (8-3/4-LDIM)
- 7 ¾" (197mm) (7-3/4-LDIM)
- 9 ¾" (248mm) (9-3/4-LDIM)
- 2 ¾" (70mm) (2-3/4-LDIM)
- 11 ¾" (298mm) (11-3/4-LDIM)
- 5 ¾" (146mm) (5-3/4-LDIM)

Wall Box

Standard (not included, order separately)

Handle

Metal Oscillating (J)

Push Button

3" Metal Oscillating (L3)

Control Stop

1" Straight (E)

Outlet Tube

Trap Primer (TP)

Bumper

Double Wall (YI)

Compliances & Certifications

- BAA Compliant
- BABAA Compliant
- Made in the USA
- UPC Certified
- cUPC Certified
- BREEAM Water Credit
- Green Globes Water Credit
- LEED V4 Water Efficiency Credit
- Satisfies LEED Credits

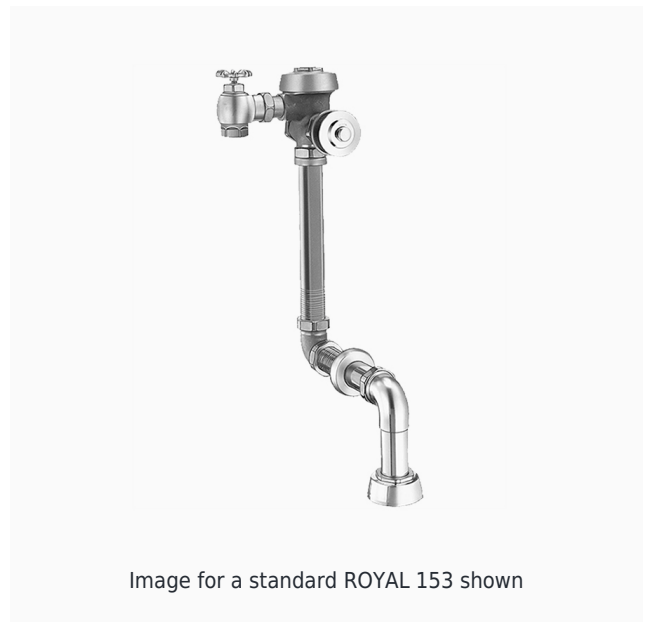


Image for a standard ROYAL 153 shown

DESCRIPTION

Royal® Concealed Manual Water Closet Flushometer

FEATURES

- Flush volumes start as low as 1.28 gpf/4.8 Lpf
- Water conservation is aided by the ADA-compliant, non-hold-open handle, which prevents toilet from exceeding intended flush volume
- Flush accuracy is controlled by CID™ technology, also enhancing water efficiency
- Integrity of the product is maintained with the vandal-resistant stop cap
- Durability is facilitated with high copper, low zinc brass castings for dezincification resistance
- Adjustable tailpiece
- PERMEX synthetic rubber diaphragm with Dual Filtered Fixed Bypass
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

DOWNLOADS

- [Sloan Concealed Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Concealed Flushometers Repair and Maintenance Guide](#)
- [Additional Downloads](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com

WaterSense Listed

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.