

OPTIONS**Flush Volume**

- 1.6 gpf (6.0 Lpf) (1.6)
- 1.6/1.1 gpf (6.0/4.2 Lpf) (1.6/1.1)

Bypass

- Dual-Filtered Fixed Bypass Diaphragm

Adapter

- Cast Set Screw Wall Flange (YBC)

Bumper

- Angle Stop (YO)
- Angle Stop Extended (YG)

Special Features

- Less Logo (LL)

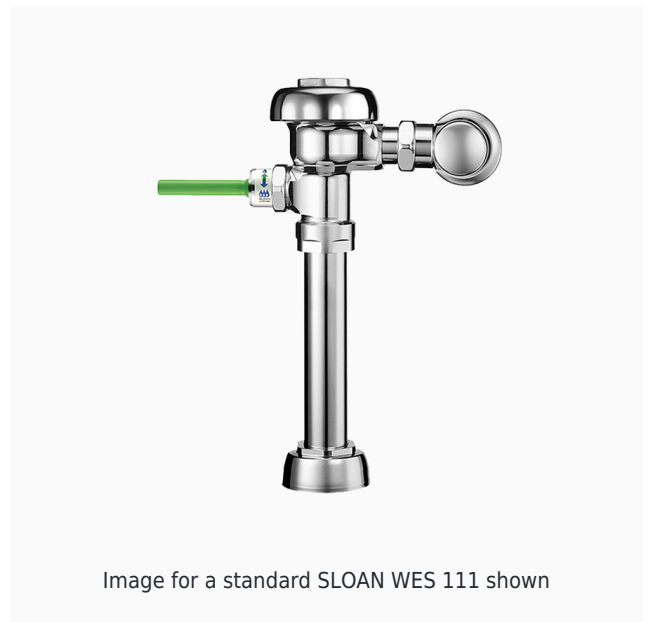
Compliances & Certifications

- ADA Compliant
- BAA Compliant
- BABAA Compliant
- Made in the USA
- UPC Certified
- cUPC Certified
- EPD
- WELL Building Standard
- cUPC Green Certified

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

**DESCRIPTION**

Sloan® Exposed Manual Water Closet Flushometer

FEATURES

- High chloramine resistant PERMEX synthetic rubber diaphragm with Linear Filtered Bypass and Vortex Cleansing Action
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

DOWNLOADS

- [UPPERCUT Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Additional Downloads](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com