

**OPTIONS****Flush Volume**

- 1.6 gpf (6.0 Lpf) (1.6)
- 3.5 gpf (13.2 Lpf) (3.5)
- 2.4 gpf (9.1 Lpf) (2.4)

**Water Efficiency**

- Water Saver
- Low Consumption

**Handle**

- Front of Valve (H)

**Offset**

- 1" (25mm) (1-OFST)

**Special Features**

- Whitworth Thread (WWT)

**Compliances & Certifications**

- ADA Compliant
- BAA Compliant
- BABAA Compliant
- Made in the USA
- UPC Certified
- cUPC Certified

**NOTES**

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

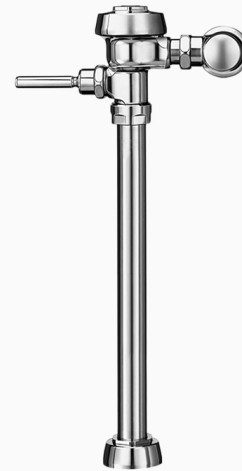


Image for a standard ROYAL 114 shown

**DESCRIPTION**

Royal® Exposed Manual Water Closet Flushometer

**FEATURES**

- Flush volumes start as low as 1.28 gpf/4.8 Lpf
- Water conservation is aided by the ADA-compliant, non-hold-open handle, which prevents toilet from exceeding intended flush volume
- Flush accuracy is controlled by CID™ technology, also enhancing water efficiency
- Integrity of the product is maintained with the vandal-resistant stop cap
- Durability is facilitated with high copper, low zinc brass castings for dezincification resistance
- Adjustable tailpiece accommodates different height requirements
- PERMEX synthetic rubber diaphragm with Dual Filtered Fixed Bypass
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

**DOWNLOADS**

- [Royal Exposed Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Royal Manual Diaphragm Flushometer Repair and Maintenance Guide](#)
- [Additional Downloads](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • [sloan.com](http://sloan.com)