

OPTIONS**Flush Volume**

- 1.0 gpf (3.8 Lpf) (1.0)
- 0.5 gpf (1.9 Lpf) (0.5)
- 1.5 gpf (5.7 Lpf) (1.5)

Water Efficiency

- Low Consumption
- High Efficiency
- Water Saver

Control Stop

- No (XD)
- Adjustable Ground Joint for Tek (XDT)

Compliances & Certifications

- ADA Compliant
- BAA Compliant
- BABAA Compliant
- Made in the USA
- cUPC Certified
- UPC Certified
- BREEAM Water Credit
- Green Globes Water Credit
- LEED V4 Water Efficiency Credit
- Satisfies LEED Credits

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

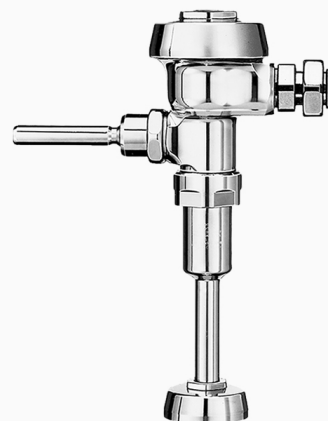


Image for a standard ROYAL 188 shown

DESCRIPTION

Royal® Exposed Manual Urinal Flushometer

FEATURES

- The Flushometer replaces existing Cambridge Brass Teck Valves without having to replace the supply control stop.
- Various water-saving flush volumes for urinals and water closets
- Water conservation is aided by the ADA-compliant, non-hold-open handle, which prevents fixture from exceeding intended flush volume
- Flush accuracy is controlled by CID™ technology, also enhancing water efficiency
- Durability is facilitated with high copper, low zinc brass castings for dezincification resistance
- Vandal-resistant stop cap prevents tampering
- PERMEX synthetic rubber diaphragm with Dual Filtered Fixed Bypass
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

DOWNLOADS

- [Royal Exposed Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Royal Manual Diaphragm Flushometer Repair and Maintenance Guide](#)
- [Additional Downloads](#)