

OPTIONS**Power Type**

Solar

Body Type

Mid

Mounting

Deck

Power Supply

Solar (SOL)

Sensor Type

Infrared

Flow Rate

0.35 gpm (1.3 Lpm) (0.35GPM)

0.5 gpm (1.9 Lpm) (0.5GPM)

1.0 gpm (3.8 Lpm) (1.0GPM)

Spray Type

Multi-Laminar (MLM)

Aerated (AER)

Laminar (LAM)

Finish

Polished Chrome (CP)

Brushed Stainless (SF)

Polished Brass (PB)

Brushed Nickel (BN)

Control Access

Above Deck

Mixer

Integrated Side Mixer (ISM)

Mixer Not Included

Integrated Thermostatic Mixer (ITM)

Special Features

IQ Click (IQ)

2" Extension (EXT)

Carbon Offset (CO)

Less Logo (LL)

Compliances & Certifications

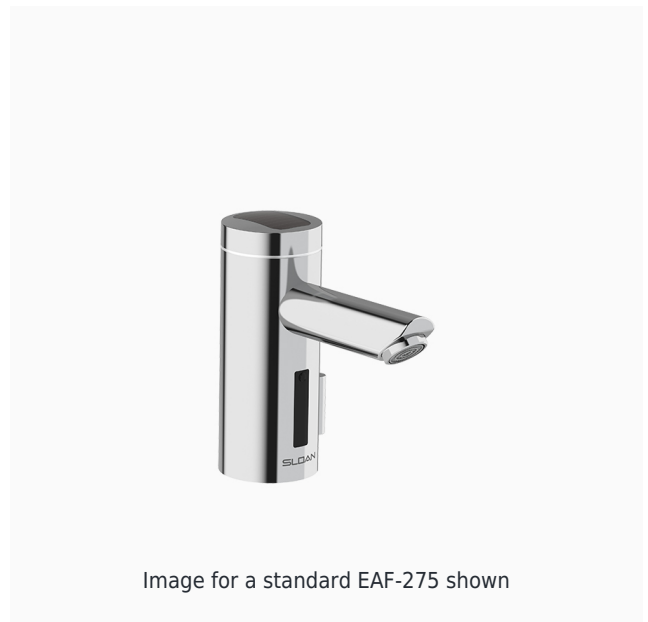
ADA Compliant

ASME A112.18.1 Compliant

CEC Compliant

EPD

HPD

**DESCRIPTION**

Optima® Solar-Powered Deck-Mounted Mid Body

FEATURES

Commercial Grade, ADA Compliant, Electronic, Sensor-Activated, Die-Cast Metal Hand Washing Faucet with the following features:

- Double Infrared Sensors with Automatic Setting Feature
- Automatic Self-adapting Sensor Technology
- Solar Powered
- Magnetic Solenoid Valve
- Water Supply Connection with Flexible High-pressure Hose and Strainer
- Appropriate Mounting Hardware included
- Includes 6 VDC Lithium Battery Back-up Power Source
- 3 year limited warranty

DOWNLOADS

- [EAF 200/225/250/275 Installation Instructions](#)
- [EAF 200/225/250/275 \(SP\) Installation Instructions](#)
- [Faucet Spray Heads Repair and Maintenance Guide](#)
- [Optima Plus EAF 275 Repair and Maintenance Guide](#)
- [Trim Plate Guide](#)
- [Additional Downloads](#)

VIDEOS

-  [PVD Special Finishes](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com

NSF-61
NYC604.4
Proposition 65
TAS
UPC Certified

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

[Find a matching soap dispenser](#) for this faucet.

[Find a compatible sink](#) for this faucet.