

**OPTIONS**
**Flush Volume**

- 0.125 gpf (0.5 Lpf) (0.125)
- 0.5 gpf (1.9 Lpf) (0.5)
- 1.0 gpf (3.8 Lpf) (1.0)
- 0.25 gpf (0.9 Lpf) (0.25)
- 1.5 gpf (5.7 Lpf) (1.5)

**Finish**

- Polished Chrome (CP)
- Brushed Stainless (SF)
- Brushed Nickel (BN)
- Graphite (GR)
- Polished Brass (PB)

**Power Type**

- Solar

**Activation**

- Sensor

**Valve**

- Diaphragm

**Water Efficiency**

- High Efficiency
- Low Consumption
- Water Saver

**Fixture Type**

- Urinal

**Fixture Connection**

- Top Spud

**Installation**

- Exposed

**Override**

- Electrical

**Control Stop**

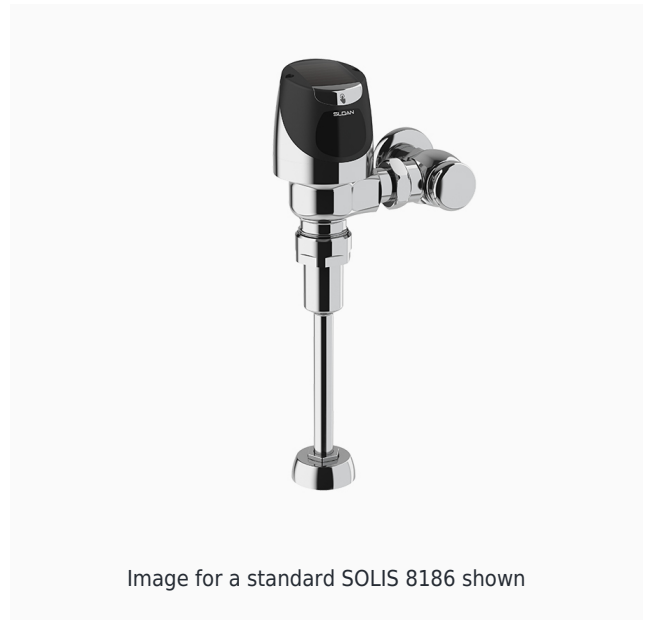
- 1"
- Less (L/STOP)

**Special Features**

- Carbon Offset (CO)
- Less Logo (LL)

**Compliances & Certifications**

- ADA Compliant
- BAA Compliant


**DESCRIPTION**

SOLIS® Exposed Sensor Urinal Flushometer

**FEATURES**

- Handle Packing, Main Seat, Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine resistance
- User-friendly, three-second flush delay and Courtesy Flush™ override button
- "Low Battery" Flashing LED
- Sweat solder adapter with cover tube and cast wall flange with set screw
- Solar Powered. The sensor assembly is powered by a solar cell that will harvest power from the artificial indoor light (incandescent, fluorescent or LED), and use it as the energy source. The solar cell can provide approximately 100% power with 650 illuminance (lux).
- Four (4) Size AA Battery Back-up Power Source
- Synthetic rubber seals for chloramine resistance
- Infrared Sensor with Multiple-focused, Lobular Sensing Fields for high and low target detection
- Fixed metering bypass and no external volume adjustment to ensure water conservation
- Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Engineered Metal Cover with replaceable Lens Window
- ADA Compliant Sloan Solis® Solar Powered Infrared Sensor for automatic "No Hands" operation
- 3/4" IPS screwdriver Bak-Chek® angle stop with vandal resistant stop cap
- User-friendly, three-second flush delay and Courtesy Flush® override button

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • [sloan.com](http://sloan.com)

BABAA Compliant  
cUPC Certified  
EPD  
HPD  
Satisfies LEED Credits  
WaterSense Listed  
cUPC Green Certified  
BREEAM Water Credit

**NOTES**

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

- High Copper, low zinc brass castings for dezincification resistance
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037

**DOWNLOADS**

- [Solis 8100 Series \(Spanish\) Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Concealed Solis Repair and Maintenance Guide](#)
- [Exposed Solis Repair and Maintenance Guide](#)
- [Flushometer Pressure gauges](#)
- [Additional Downloads](#)

**VIDEOS**

-  PVD Special Finishes